

MODEL FC-24 FLOW CONTROLLER

CPN# 999331




- Digital Display motor amps
- High-Low Alarm Contacts
- Easy Panel Mounting
- Accepts Remote Command Setpoint
- Provides Analog Recorder Output
- Monitor Flow (lbs/min, kg/min, etc).

The Model FC-24 Shot Flow Controller is a self-contained servo control for accurate regulation of steel shot using a MagnaValve. The control may operate as a stand-alone control or work with a customer's programmable controller via standard analog 0-10Vdc interface. Flow rate signal from the MagnaValve is used as the input signal.

ELECTRONICS INCORPORATED

MODEL FC FLOW CONTROLLER

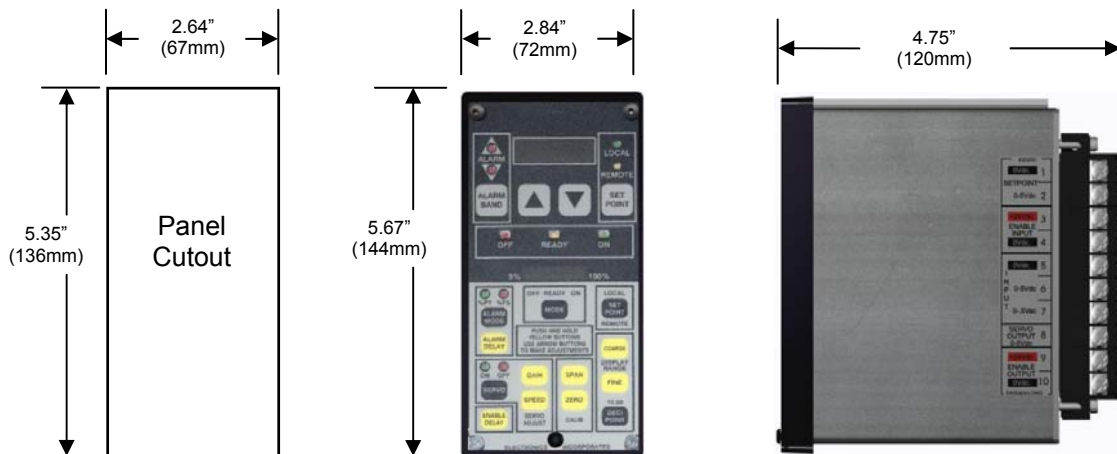

Temperature Range: 0-50°C/ 32-122°F

All adjustments are available behind the front access plate

Specifications

Power:	24Vdc @ 0.5A
Inputs:	0-10Vdc (From MagnaValve Sensor Remote Command Setpoint (0 -10Vdc) Enable (24Vdc) Alarm Reset (24Vdc)
Outputs:	Servo Output Signal 0-10Vdc Recorder Analog Output (0 -10Vdc) Alarm Relay Contacts (115Vac @ 0.5Amp) Enable output 24Vdc
Weight:	1.3lbs.
Display Range:	0 -1999
Decimal Points:	1000, 100.0, 10.0
Alarm Band:	0 -50% of full scale
Alarm Delay:	0 -10 seconds
Enable Delay:	0 -10 seconds



Wiring Connections

- | | |
|-----------------------------------|-------------------------------|
| 1. 0Vdc | 11. 0Vdc |
| 2. Remote Set Point input 0-10Vdc | 12. Alarm Reset (24Vdc) |
| 3. 0Vdc | 13. High Alarm Relay Contact |
| 4. Enable Input (24Vdc) | 14. Relay Contact Common |
| 5. 0Vdc | 15. Low Alarm Relay Contact |
| 6. Process Input (0-10Vdc) | 16. Flow OK Relay Contact |
| 7. Process Input (0-0.5Vac) | 17. 0Vdc |
| 8. Servo Output (0-10Vdc) | 18. Recorder Output (0-10Vdc) |
| 9. Enable Output (24Vdc) | 19. Power (24Vdc) |
| 10. 0Vdc | 20. 0Vdc |

Note: Green screw for earth-chassis ground used for shield termination.

56790 Magnetic Drive, Mishawaka, IN, USA 46545 (574) 256-5001